



81-531 Industrial Place  
Indio, CA 92221  
www.elmsrental.com  
760-342-7930 Phone  
760-342-7950 Fax

## Status: Quote

Quote #: q1822-4

Quote To: Wed 6/28/2023 9:00AM

Operator: JAMES ANGROS

Terms: Net 30

Customer #: 2655

CITY OF CATHEDRAL CITY

Phone 760-770-0340

68-700 AVENIDA LALO GUERRERO

Job Descr: TBD

CATHEDRAL CITY, CA 92234

Job No: TBD

Warning: Cancer and reproductive harm. For more information go to [www.p65warning.ca.gov](http://www.p65warning.ca.gov)

Ordered By: MIKE WALLA

Salesman: JAMES ANGROS 760-275-9299 [james@elmsrental.com](mailto:james@elmsrental.com)

24.8HP KUBOTA  
HYDRAULIC BED DUMP  
WORK LIGHTS AND TURN SIGNALS  
BRUSH GUARD AND MIRRORS  
XD MOUNTED ELECTRIC OVER HYDRAULIC  
SPINNER AND BELT CAN BE CONTROLLED FROM XD TRUCKSTER  
PARKING STAND KIT

Qty	Key	Items	Status	Each	Price
1	MS-4	JACOBSEN DIESEL XD 4WD TRUCKSTER	Retail	\$46,156.00	\$46,156.00
1	MS-4	DAKOTA 410 TURF TENDER	Retail	\$22,554.00	\$22,554.00

Quote valid for 30 days.

This is a Quote Only

### Quote

Sales:	\$68,710.00
Subtotal:	\$68,710.00
Sales Tax:	\$6,012.13
Total:	\$74,722.13
Paid:	\$0.00
Amount Due:	\$74,722.13

**DAKOTA™**



**Turf Tenders**  
The most versatile material handlers in the world.



# 310 Turf Tender



# Work Different.

The Dakota **Turf Tender 310** will change the way you work. We've brought the world-class performance and reliability of our 400 series to a new, compact machine. Spreads light to heavy, wet or dry.



## Features

### 310 Turf Tender

**Weight** = 800 lbs  
**Capacity** = 10 cu ft level, 12 cu ft heaped  
**Spreading width** = approx. 20'  
**11 hp Honda Engine** with electric start

**Hydrostatic Drive:**  
**Speed forward** = 3.8 mph  
**Speed reverse** = 1.25 mph

**Hopper Dimensions:**  
› Length = 36"  
› Width = 34"  
› Height = 38"  
**Overall Dimensions:**  
› Width = 38"  
› Length = 101"



# 410 Turf Tender



Save time and costs with the 410 series. Spreads light to heavy, wet or dry.



# Features

## 410 Turf Tender Pull Type

### Pull Unit Requirements:

- › Requires 3-7 GPM. Oil flow without optional power unit

### Overall Dimensions:

- › Overall length = 144 in
- › Overall width = 60 in
- › Height = 50 in
- › Weight = 920 lbs.
- › Weight = 1240 lbs. (with optional power unit)

### Hopper:

- › Capacity = 23 cu ft. (.65m<sup>3</sup>) level, 27 cu ft. (.76m<sup>3</sup>) heaped
- › Trackless 18 in PVC belt (crescent-style)
- › Rear door adjusted from 0" to 7"
- › Powder coat paint
- › Hopper length = 76 in

### Frame:

- › Welded heavy-duty A-frame construction
- › Jack stand

### Tires:

- › 2 Ultra Trac Turf Tires 26.5x14x12

### Dual Spinner System:

- › 2 Throw discs (24 in diameter, 6 adjustable paddles per disc)
- › Quick change
- › 2 hydraulic motors, 1 per spinner-disc
- › Spreading width 12' to 49' variable
- › Spreading application (extremely fine to very heavy)
- › Capable of spreading a large variety of materials

## Options

---

### Controls:

- › Electric over hydraulic machine (controls belt and spinner speed from the vehicle mounted control panel with speed gauges)
- › Manual hydraulic machine (valves on the side of the machine to control the belt and spinner speed) with vehicle mounted on/off switches

### Optional Spinners:

- › Black spinners (fertilizer)
- › Green spinners (grass seed)

### Optional Power Unit:

- › Honda 11 hp engine
- › Electric start
- › 1.72 US Gal. fuel tank
- › Max. Pressure = 2500 psi
- › Max. Flow = 7.26 GPM
- › Reservoir size = 11.5 gal.

### Optional Rear Conveyor

### Optional Auto Rear Door

### Optional Roll Tarp

## 410 Turf Tender Mounted

### Models: Mounted

- › Mounts on John Deere Pro Gator™, Toro Workman™, or Jacobsen Truckster™ XD

### Requirements:

- › John Deere™ PTO Hydraulic kit required on John Deere ProGator™
- › DAKOTA Auxiliary hydraulic kit required on Toro Workman™ on models older than 2001, 2002 and newer requires Toro High Flow hydraulics

### Overall Dimensions:

- › Overall length = 103 in
- › Overall width = 60 in
- › Height = 54 in
- › Weight = 780 lbs. with sub-frame

### Hopper:

- › Capacity = 23 cu ft. (.65m<sup>3</sup>) level, 27 cu ft. (.76m<sup>3</sup>) heaped (Note: Do not exceed recommended vehicle load rating for John Deere Pro Gator™, Toro Workman™, or Jacobsen Truckster™ XD)
- › Trackless 18 in PVC belt (crescent-style)
- › Rear door adjusted from 0" to 7"
- › Powder coat paint
- › Hopper length = 76 in

### Frame:

- › Welded heavy-duty sub-frame
- › Mounts using existing cylinder and box mount

### Dual Spinner System:

- › 2 Throw discs (24 in diameter, 6 adjustable paddles per disc)
- › Quick change
- › 2 hydraulic motors, 1 per spinner-disc
- › Spreading width = 12' to 40' variable
- › Spreading application is adjustable (extremely fine to very heavy)
- › Capable of spreading a large variety of materials

## Options

---

### Controls:

- › Electric over hydraulic machine (controls belt and spinner speed from the vehicle mounted control panel with speed gauges)
- › Manual hydraulic machine (valves on the side of the machine to control the belt and spinner speed) with vehicle mounted on/off switches

### Optional Spinners:

- › Black spinners (fertilizer)
- › Green spinners (grass seed)

### Optional Parking Stand:

- › Easy on/off using 4 legs
- › Rear legs are jack stands

### Optional Rear Conveyor

### Optional Auto Rear Door



# 410 Turf Tender

As icons in turf material handlers,  
we strive to continue the legend.


**RELIABLE. FUNCTIONAL. PROVEN.**



## DAKOTA CONTROLS

- 4.3" LCD display
- Four memory presets
- Features
  - Variable belt and spinner speeds
  - Engine start/stop and throttle control
- Reference screens for unit settings and adjustments



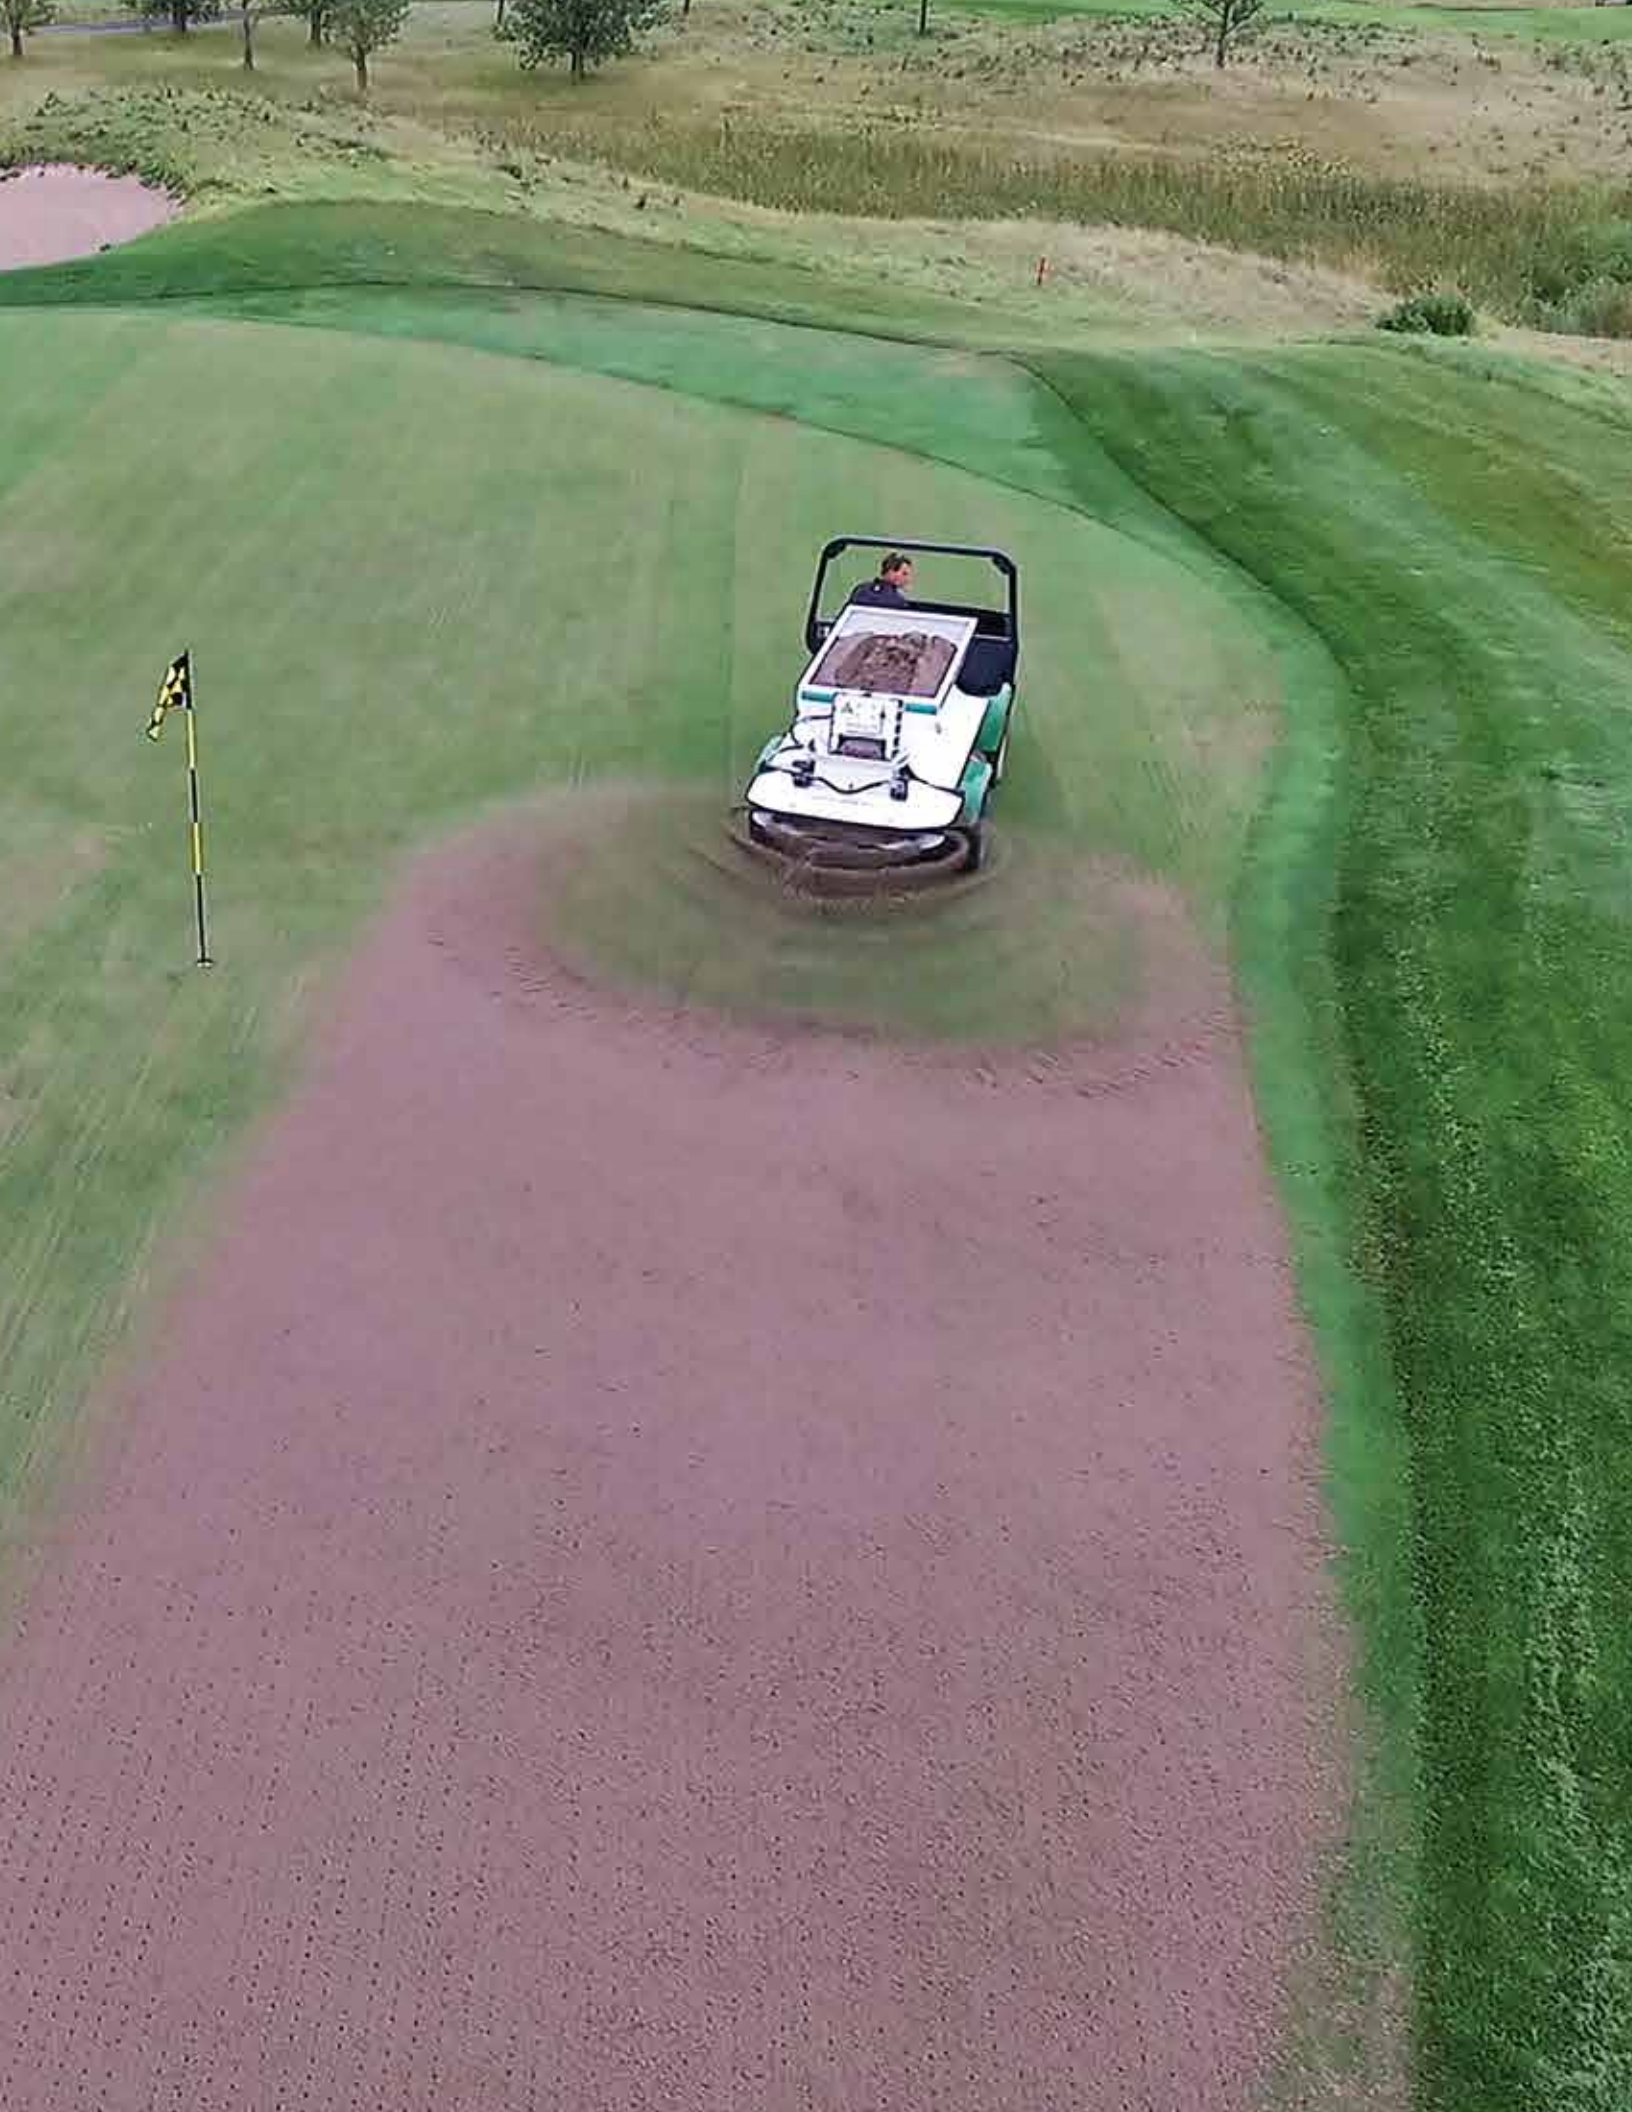





## 412 & 414 Turf Tender



# Features

## 412 & 414 Turf Tender

### Frame:

- › Heavy duty A-frame construction
- › Side-to-side walking axles
- › Jack stand

### Controls:

- › Electric over hydraulic machine (controls belt and spinner speed from the vehicle-mounted control panel with speed gauges)
- › Manual hydraulic machine (valves on the side of the machine to control the belt and spinner speed) with vehicle-mounted on/off switches

### Hydraulic System:

- › 2500 PSI or 138 BAR MAX
- › 1 bank, 2 lines

### Maximum Transport Speed:

- › Empty = 15 mph or 24 kph; not for highway use
- › Loaded = Dependent on terrain conditions for safe operation

### Hopper Door:

- › Manual rear metering gate

### Dual Spinner System:

- › 2 throw discs (24 in diameter, 6 adjustable paddles per disc)
- › Quick change
- › 2 hydraulic motors, 1 per spinner disc
- › Spreading width = 12- to 40- foot variable
- › Spreading application is adjustable (extremely fine to very heavy)
- › Capable of spreading a large variety of materials

### Optional Spinners:

- › Black spinners (fertilizer)
- › Green spinners (grass seed)

### Hopper:

- › Trackless 18 in PVC belt (crescent style)
- › Powder coat paint
- › Capacity =

	412	414
	2.00 cu yds (1.53m <sup>3</sup> ) level	4.2 cu yds (3.21m <sup>3</sup> ) level
	2.38 cu yds (1.82m <sup>3</sup> ) level	5.0 cu yds (3.82m <sup>3</sup> ) level

### Tires:

26.5x14x12 Ultra Trac Turf Tire	33x16x16.1 <b>DAKOTA</b> Turf Tire or 33x20x16.1 <b>DAKOTA</b> Turf Tire
---------------------------------------	---

### Tractor Requirements:

- › Horsepower = Minimum 25 hp Minimum 40 hp
- › Hydraulics = 7-11 GPM 7-11 GPM

### Overall Dimensions:

- › Height = 67 in 79 in
- › Length = 144 in 188 in
- › Width = 81 in 96/102 in
- › Hopper length = 76 in 100 in

### Shipping Weight:

1,825 lbs or 827 Kg	3,000 lbs or 1361 Kg
------------------------	-------------------------

### Maximum Weight:

7,825 lbs or 3,549 Kg GVW	13,000 lbs or 5,897 Kg GVW
------------------------------	-------------------------------

### Options

Vibrator

Electric Brakes (2- or 4-wheel)

Roll Tarp

Auto Rear Door






# 420 & 440 Turf Tender



World-class performance and reliability.

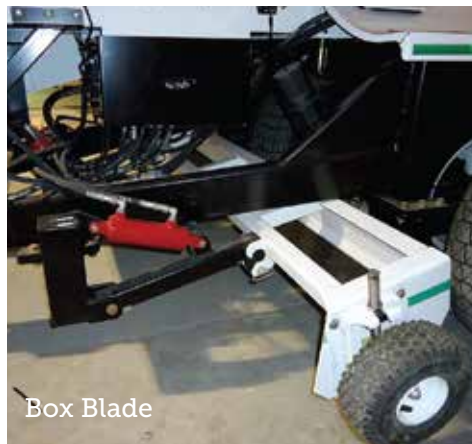

Box Blade



Side Conveyor



Load Breaker



Blender Option

# Features

## 420 Turf Tender

### Tractor Requirements:

- › Minimum 25 hp
- › Hydraulics = 4-11 GPM

### Frame:

- › Heavy-duty A-frame construction
- › Side-to-side walking axles
- › Jack stand
- › Electric brakes (2-wheel standard)

### Overall Dimensions:

- › Height = 68 in
- › Length = 172 in
- › Width = 81 in

### Hopper:

- › Capacity = 2 cu yds (1.53m<sup>3</sup>) level, 2.38 cu yds (1.82m<sup>3</sup>) heaped
- › Dual hydraulic drive both forward and reverse
- › Trackless 18 in PVC belt (crescent-style)

### Powder coat paint

- › Hopper length = 76 in

### Tires (4):

- › 26.5x14x12 Ultra Trac Turf Tire

### Controls:

- › Vehicle mount control panel for electric over hydraulic drive system controls all options

## Options

### Hopper Doors:

- › Electric front door or manual front door
- › Hydraulic rear door (with metering gate) or manual rear door metering gate

### Side Conveyor:

- › Belt width = 14 in (crescent belt)
- › Conveyor length = 136 in
- › Conveyor discharge height = 48" to 70"
- › Electric chute

### Box Scraper:

- › 80 in blade length (replaceable cutting edge)
- › Quick disconnect
- › Hydraulic down pressure
- › Float control

### Dual Spinner System:

- › 2 throw discs (24 in diameter, 6 adjustable paddles per disc)
- › Quick change
- › 2 hydraulic motors, 1 per spinner-disc
- › Spreading width = 12- to 40- foot variable
- › Spreading application (extremely fine to very heavy)
- › Capable of spreading a large variety of materials

### Optional Spinners:

- › Black spinners (fertilizer)
- › Green spinners (grass seed)

### Other Options:

- › Hopper vibrator
- › 4-wheel brakes

### Optional Auto Rear Door

### Optional Roll Tarp

## 440 Turf Tender

### Tractor Requirements:

- › Minimum 40 hp
- › Hydraulics = 4-11 GPM

### Frame:

- › Heavy duty A-frame construction
- › Side-to-side walking axles
- › Jack stand
- › Electric brakes (2-wheel standard)

### Overall Dimensions:

- › Height = 79 in
- › Length = 192 in
- › Width = 96" to 102"

### Hopper:

- › Capacity = 4.2 cu ft. (3.21m<sup>3</sup>) level, 5 cu ft. (3.82m<sup>3</sup>) heaped
- › Dual hydraulic drive both forward and reverse
- › Trackless 18 in PVC belt (crescent-style)
- › Powder coat paint
- › Hopper length = 100 in

### Tires (4):

- › 33x16x16.1 DAKOTA Turf Tire
- › 33x20x16.1 DAKOTA Turf Tire (optional)

### Controls:

- › Vehicle mount control panel for electric over hydraulic drive system controls all options

## Options

### Hopper Doors:

- › Electric front door or manual front door
- › Hydraulic rear door (with metering gate) or manual rear door metering gate

### Side Conveyor:

- › Belt width = 14 in (crescent belt)
- › Conveyor length = 156 in
- › Conveyor discharge height = 55" to 80"
- › Electric chute

### Box Scraper:

- › 80 in blade length (replaceable cutting edge)
- › Quick disconnect
- › Hydraulic down pressure
- › Float control

### Dual Spinner System:

- › 2 throw discs (24 in diameter, 6 adjustable paddles per disc)
- › Quick change
- › 2 hydraulic motors, 1 per spinner disc
- › Spreading width = 12- to 40- foot variable
- › Spreading application (extremely fine to very heavy)
- › Capable of spreading a large variety of materials

### Optional Spinners:

- › Black spinners (fertilizer)
- › Green spinners (grass seed)

### Other Options:

- › Hopper vibrator
- › 4-wheel brake
- › Hydraulic load braker

### Optional Auto Rear Door

### Optional Roll Tarp

### Optional Load Breaker

### Optional Blender





See your local distributor today!



P.O. Box 14088  
Grand Forks, ND 58208-4088  
800.477.8415  
[dakotapeat.com](http://dakotapeat.com)

TRUCKSTER XD™

Heavy Duty Utility Vehicle

SPECIFICATIONS

Engine	Gas	Diesel
Type	Kubota® 972EFI gas, 3-cylinder, 4-cycle, liquid cooled electronic fuel injection	Kubota® D1105 diesel, 3-cylinder, 4-cycle, liquid cooled
Horsepower*	32.5 hp (25.2 kW)	24.8 hp (18.5 kW)
Torque	51.6 ft-lbs (70 Nm)	52.7ft-lbs
Air Cleaner	Donaldson® dry cartridge type with evacuator valve	
Fuel Capacity	7.0 gal. (26.5 L) unleaded	
Electrical System	60 amp, heavy duty alternator; 12 V starter with safety interlock	
Drive Train		
Manual Transmission	Five speed manual transmission with low-low (creeper) first gear; synchronized in all forward gears; two speed rear axle	
Clutch	7.1 in. (180 mm) single disc and pressure plate	
Differential Lock	Electric differential lock on rear axle with momentary engagement switch on dash	
Speeds	Maximum speed of 23 mph (37.0 kph) Optional 5th gear lock out available	Maximum speed of 21 mph (33.8 kph) Optional 5th gear lock out available
Tires, Brakes and Steering		
Front Tires	23 x 10.5 - 14 6-ply Ribbed (2WD)	23 x 10.5 - 14 6-ply Treaded (4WD)
Rear Tires	26 x 12 - 14 6-ply Ultra Chevron tread	
Brakes	Service brakes: Heavy duty hydraulic four wheel disk brakes with 10.7 in. (272 mm) disk. Parking Brake: Hand lever actuated disk brakes on rear wheels.	
Steering	Hydrostatic Power Steering	
Front Suspension	Solid axle with heavy duty multiple leaf springs and shock absorbers	
Rear Suspension	Solid axle with heavy duty multiple leaf springs and shock absorbers	
Turning radius 2WD	28 in. (71 cm)	
Turning radius 4WD	80 in. (203 cm)	
Weight and Dimensions		
Maximum Capacity	3,550 lbs. (1614 kg) Maximum capacity. Available payload capacity includes weight of driver, passenger, added accessories	
Weight	2WD 1,943 (881 kg) 4WD 2,201 (998 kg)	2WD 1,969 (893 kg) 4WD 2,227 (1,010 kg)
Length	132 in. (3.35 m) without box; 136 in ( 3.45 m) with box	
Height	78 in. (1.98 m)	
Wheelbase	65 in. (1.65 m)	
Width	65 in. (1.65 m)	

\*Engine horsepower is provided by engine manufacturer. Actual operating power output may vary due to conditions of specific use.  
NOTE: Specifications, while correct at time of printing, may change without notice.



Heavy Duty Utility Vehicle

TRUCKSTER XD™



The all new Truckster XD™ by Jacobsen is a true heavy duty utility vehicle. The Truckster XD™ has the largest standard payload capacity, a rugged and durable box made from thick 12 gauge steel, and is paired with the most powerful gas and diesel Kubota engines available. The all-new Jacobsen Truckster XD™ is designed to make your toughest jobs easier.

QUICK SPECS

- Engine:

Gas

32.5 HP (24.2 kW)  
51.6 ft-lbs (70 Nm)
- Diesel

24.8 HP (18.5 kW)  
52.7 ft-lbs (71.5 Nm)
- Payload Capacity:

3,550 lbs. (1,610 kg)
- Drive Train:

Five speed manual transmission  
Two speed rear axle with locking differential  
2WD or 4WD
- Speed:

Gas

23 mph (37.0 kph)
- Diesel

21 mph (33.8 kph)
- Dimensions:

Length

132 in. (3.35 m) without box  
136 in. (3.45 m) with box
- Height

78 in. (1.98 m)
- Width

65 in. (1.65 m)



# TRUCKSTER XD™

- **Highest Standard payload** of 3,550 lbs. (1,610 kg). The largest payload makes quick work of your biggest jobs since fewer trips are required. Heavy duty rear differential was custom designed for the Truckster XD™.
- **Toughest box** is built using the heaviest gauge steel of any box, up to 75% thicker than comparable boxes and has 20% more volume. Rugged tailgate and latch with easy slam shut function. Built-in stake pockets and multiple tie down points create a box with the versatility to tackle all the jobs you expect from a heavy duty utility vehicle.
- **Powerful Kubota engines with the highest HP and torque available** – Both the gas and diesel engines have the highest torque available of any heavy duty utility vehicle (52.7 ft-lbs diesel and 51.6 ft-lbs gas). The high torque allows effortless hauling of the heaviest loads and towing up to 2,200 lbs without trailer brakes (3,500 with trailer brakes).
- **Industry's roomiest operator platform** with more space for operators and well-organized controls within easy reach. The optional suspension seat provides increased operator comfort for everyday operation and for longer tasks such as topdressing or spraying.
- **Highest approach angle** allows easy operation in the most undulated turf conditions.



## AVAILABLE MODELS

Gas with Manual Transmission 2WD  
Gas with Manual Transmission 4WD  
Diesel with Manual Transmission 2WD  
Diesel with Manual Transmission 4WD

## PRODUCT CONFIGURATION

### EQUIPPED STANDARD

- ✓ Liquid cooled engine (gas and diesel)
- ✓ Five speed manual transmission
- ✓ Two speed rear axle
- ✓ Locking differential
- ✓ Four wheel hydraulic disk brakes
- ✓ Two Post ROPS with seat belts
- ✓ Tool-less radiator access
- ✓ Turf treads on rear tires
- ✓ Hydraulic powered lift lower cylinder
- ✓ Hydraulic power steering
- ✓ Sliding adjustable seat
- ✓ Center console storage
- ✓ Glove box
- ✓ Phone / cup holder
- ✓ 12V power outlet
- ✓ Headlights
- ✓ Horn
- ✓ Radio holder

### ACCESSORIES


- ☐ 66" box
- ☐ 2" Receiver hitch
- ☐ Canopy (two or four post ROPS)
- ☐ Four post ROPS
- ☐ Premium suspension seat (operator and passenger)
- ☐ Hi/Lo hydraulics with remote ports
- ☐ Hydraulic PTO
- ☐ Throttle control
- ☐ Turn signals
- ☐ Cab (roof, windshield, wiper, rear window)
- ☐ Doors
- ☐ Heater
- ☐ Auto tailgate
- ☐ Fifth wheel ball hitch including electric brake controller
- ☐ Core Harvester
- ☐ Top Dresser 1500
- ☐ Vicon Spreader
- ☐ Quick Aerator
- ☐ Implement Lift
- ☐ Mirrors, left and right
- ☐ Windshield for four post ROPS
- ☐ Storage accessory
- ☐ Work Light kit
- ☐ Backup alarm
- ☐ Exhaust spark arrestor
- ☐ Fifth gear lock out



**Tool-less access to the radiator** and optional hydraulic oil cooler for easy cleaning



**Steel hydraulic tubes** used to reduce risk of hydraulic leaks and reduce maintenance



**Robust axle mounted hitch** with 600 lbs tongue weight and 2,200 lbs. towing capacity (3,500 lbs with trailer brakes)



Factory-filled with GreensCare™  
Biodegradable Hydraulic Fluid